

Vibrating Machinery & Installations



Vibrating feeders
(Extractor hoppers)

Vibrating conveyors

Pre-selectors
scalpers-grizzlies

Screening machines and sieves

Vibrating drainers

Pneumatic vibrators and hammers to
flush out hoppers

Electrical vibrators

Quarries aggregates, mining & cement plants







Vibrotech Engineering S.L. is a Spanish company whose main activity is the design and manufacture of vibrating machinery and different types of installations to be used in the transport and selection of solid materials.

The company is formed by a team of professionals, with a wide experience in the design and manufacture of vibrating machinery and is at the disposal of its customers to meet their needs and adapt to their production demands.

The more than 20 years of experience, always in close contact with the needs of the general industry as well as our commitment to research and to the development of new solutions, enable us to lead projects in various industrial sectors.

Vibrotech Engineering S.L., has offices in Mexico, San Sebastian, Bilbao, Madrid, Barcelona, Seville and Canary Islands with a wide commercial network in order to meet the needs of our customers, both commercially and technically.

Our Technical Office is firmly committed of promoting R&D&I in the continuous search for new and better solutions.

Vibrotech Engineering, S.L., works with a firm commitment to expansion into international markets and continuous improvement in all its departments.



Vibrating conveyors

Overview

Vibrating feeders or extractor hoppers are machines that are used to extract different products from hoppers or silos, at a constant flow.

These types of machines can be manufactured with electrical or electromagnetic drives.

Optional

- Different types of coating: anti-wear, stainless, non-stick, etc...
- Hopper spout included
- Leaning or suspended

Feeders driven by motor vibrators

The flow is adjusted by handling the unbalanced motor of the electro-mechanical vibrating machines, changing the tilt angle or adjusting the opening of the gate. Another form of adjustment is by connecting the vibrating machines to a frequency variator.



Electromechanical extractor hopper



Electromechanical extractor hopper

Vibrating feeders with electromagnetic drive

These machines are driven by an electromagnetic vibrator and adjusted through an electric control box; these machines are normally used for precise weighing and dosing operations.

They are connected by an electronic control card that regulates the speed via a 4-20 mA analogue signal.



Electromagnetic extractor hopper

Tubular vibrating conveyors

These are used to transport a variety of products by vibration over a smooth surface, thereby preventing heaping and ensuring a constant flow.

These usually replace worm screw conveyors due to their maintenance problems. Depending on the products to be transported, they can be manufactured completely closed with a rectangular or circular section and also include manhole covers.



Natural frequency vibrating conveyors (long distances)

Used to convey stones at long distances

- Non limit in a single section
- Suitable to replace belt conveyors at the exit of limestone in high temperatures
- Whether opened or closed (with screwed covers or hermetic modules : rectangular, circular .. etc)
- Powered by an electric motor
- Heavy construction
- Low power consumption and minimum maintenance





Vibrotech Engineering, S.L. designs and manufactures a wide range of VIBRATING SCREENS:

Screens with circular and linear movement.
Probabilistic screens.
Dust separation sieves.

Statistical screens
Screens driven by vibratory motors.
Elastic mesh screens.

Circular and linear movement screens



Circular movement screen



Screens with circular and linear movement.

Driven by a mechanical vibrator or exciter (gear box), these can be used with all types of meshes (stainless steel or polyurethane mesh). They can be made with one, two, three or four layers of mesh. Designed for large flows and large granulometric sizes

The useful working surface can exceed 18 m² when screening all types of aggregates.

Their manufacturing design allows coupling an irrigation system to the screen to wash the product or a dust-proof canvas to prevent dust emission to the atmosphere.

An irrigation system can be coupled to the machine to wash the aggregate before it leaves the machine.




Linear movement screens



Statistical screens

These are multi-sieve (3 to 6) screens that classify products by a probabilistic method. The design allows the use of several technical storeys to improve screening efficacy. This protects the thinner fabric from impacts.

Statistical screens have the option of making operation dust-proof, circular outlet spouts and additional components to improve material feed, such as vibrating distributors. These can feed 1 or 2 screens placed in parallel.

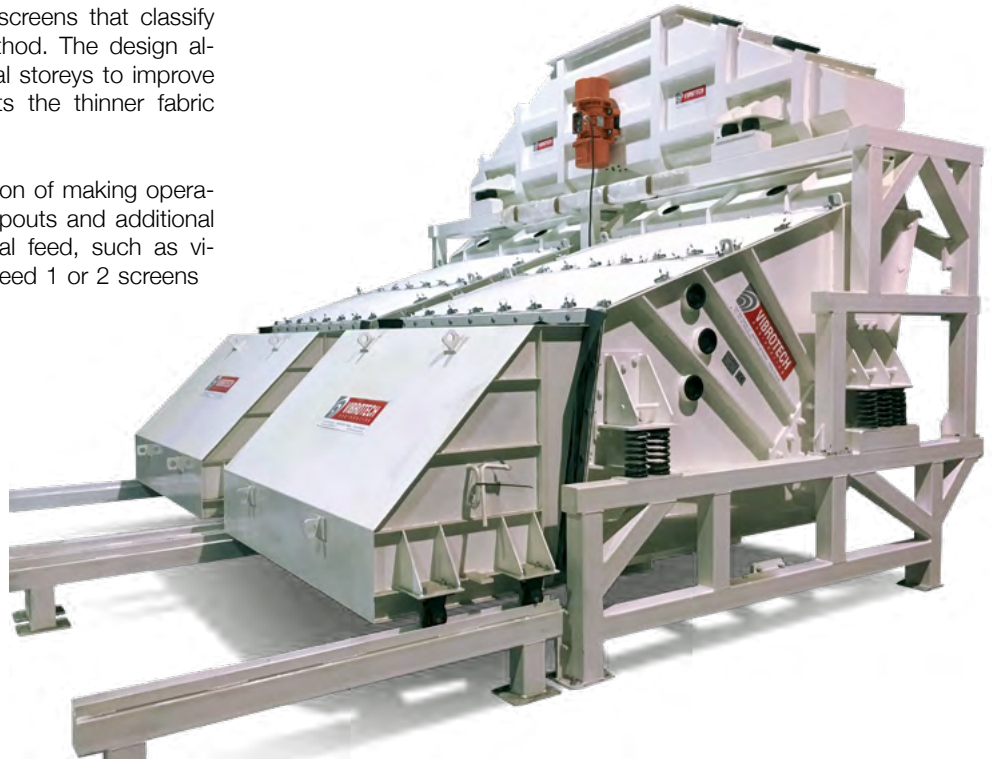

These types of screens are manufactured with standard mesh sizes of 0.5 m, 1 m, 1.5 m, 2 m and 2.5 m. A normal SS series is available, as well as an SLS series with a mesh that is 1 meter longer for larger flows on a smaller surface.

The final result is a relatively lightweight compact machine that can be used with simpler and lighter support structures than those used for traditional screening machines.



Screens-sieves driven by vibrators

These types of screens have been designed for medium and small flows and are appropriate to separate different granulometric sizes in 1, 2 or 3 storeys. Adequate for applications such as fines separation in lime production plants or others, such as the separation of all types of aggregate.

These can be optionally manufactured with complete fairings to prevent dust emissions to the atmosphere.

Springs can be tensed lengthwise and the meshes can be tensed from the rear of the screen by simply tightening three screws or the traditional transverse tensing system.



Elastic mesh screens

These screens are appropriate for products with a high degree of humidity, which makes screening very complicated.

They are manufactured to obtain high rates of acceleration so the mesh does not get obstructed.



Vibrating drainers

The vibrating drainers are used to dry a large variety of products, especially wet sands.

These eliminate the water and reduce humidity for subsequent material processing.

The option of manufacturing this equipment with a negative slope improves the humidity-reduction process.

The design of these machines allows them to be used with different types of meshes: (stainless steel grilles, rubber and/or special material meshes)



Pre-selectors grizzlies-scalpers



Pre-screener

These are generally used for production relief in crushing mills and primary jaw crushers, eliminating the fine materials before they enter.

Equipped with 2 or 3 screening grilles, this equipment eliminates the grinding or crushing process since the sizes can be used directly.

This extends the useful life of the crushing machine since it operates with less load and more regularly, eliminating the fines before they enter.

The grilles are placed in cascade so pre-screening is more efficient.

The pre-screeners are equipped with a 400 HB anti-wear plate screwed to the base and sides of the machine.



These machines can be driven by a gearbox, driven through a conventional motor or by electric vibrators.

The machines are designed to be highly resistant because of the demanding work they are subjected to.

Pneumatic vibrators & hammers

These pneumatic vibrators and knockers are appropriate to prevent product jamming in hoppers and silos.




Air cannons

These are used to flush out silos, especially in the cement and aggregate industries.



Electric vibrators

These are used to flush out silos, especially in the cement and aggregate industries.

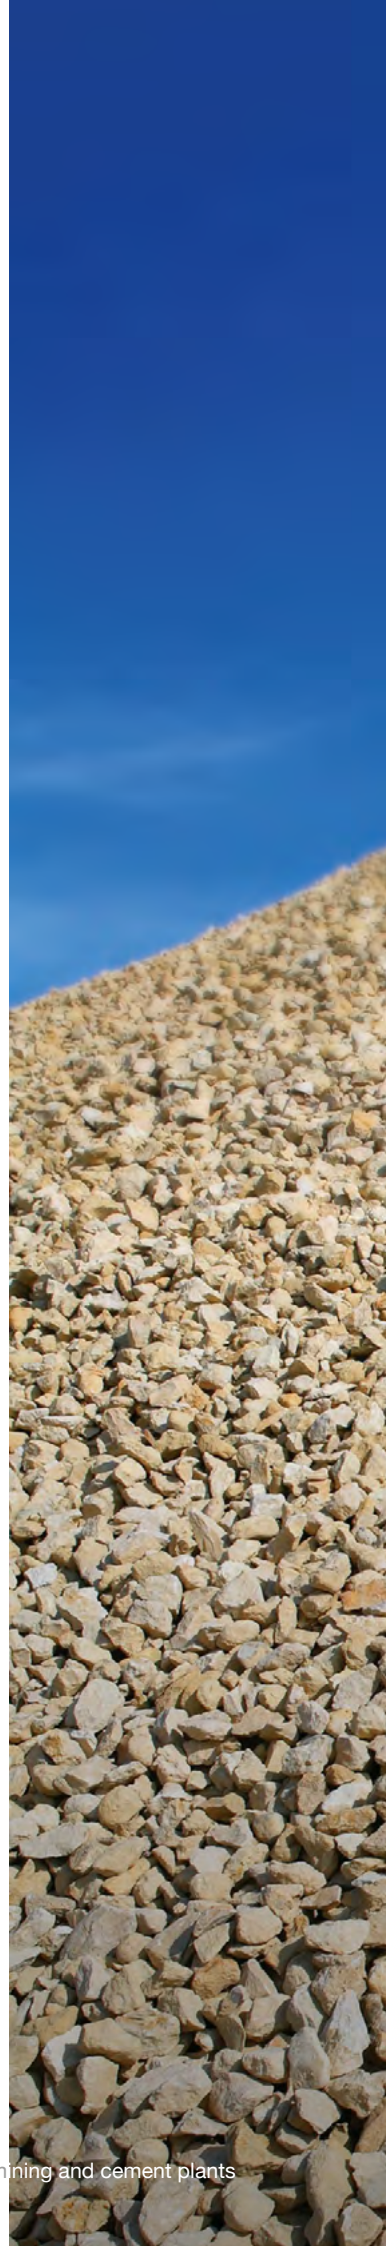





Vibrotech Egeineering, S.L.

Head Offices

Polígono Industrial Txirrita Maleo 7C
20100 Rentería
Guipúzcoa - España

Tel.: +34 943 010 811

admin@vibrotech-eng.com

www.vibrotech-eng.com